


Y TYPE DISC FILTERS

The well designed structure makes it easy to clean and can be easily installed in a narrow space. Built-in pressure pipeline, Y type disc filter will efficiently filter out particles.

TYPICAL APPLICATION

Applied to low flow rate water filtering for household, agriculture irrigation, municipal garden irrigation.

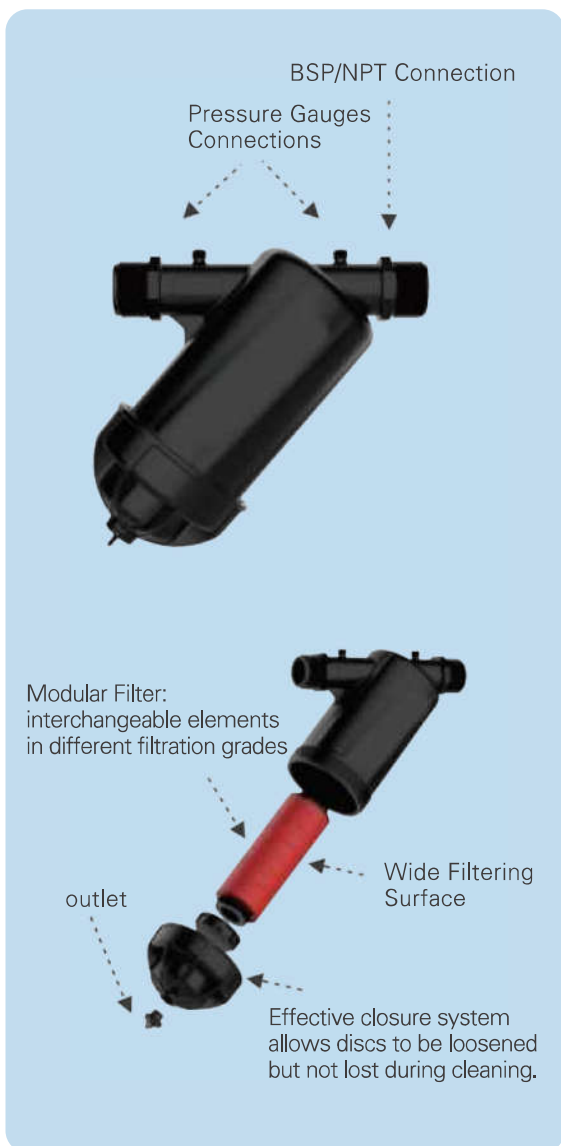


FEATURE & ADVANTAGE

- ✓ Manual cleaning
- ✓ Compact structure available in narrow space
- ✓ Threaded closure system, easy and safe
- ✓ Innovative depth filter traps design retains large amounts of solids
- ✓ Resistant to chemical products
- ✓ Easy installation, easy maintenance
- ✓ Auxiliary connection for drain & pressure
- ✓ Preset 2 ports for connection pressure gauge
- ✓ Gasket in the lid of the filter

HEAD LOSS

Y TYPE FILTER HEAD LOSS(130 micron/120mesh)

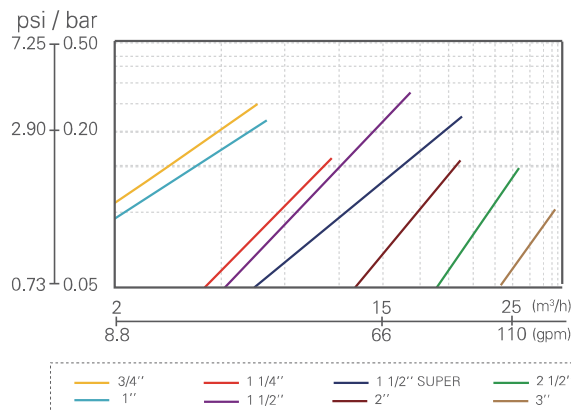

Note: The flow rate will fluctuate with different water quality.

MODEL & SPECIFICATION

MODEL	CONNECTIONS BSP/NPT	FILTRATION GRADES (mesh)	MAX FLOW (m ³ /h)	WORKING PRESSURE (bar)	FILTERING SURFACE (cm ²)	WEIGHTS (kg)
MYDF-O-20	3/4"	120	5	8	180	0.39
MYDF-20	3/4"	120	5	8	195	0.35
MYDF-O-25	1"	120	6	8	180	0.39
MYDF-25	1"	120	6	8	195	0.35
MYDF-32	1-1/4"	40/80/120/150	10	8	300	0.96
MYDF-40	1-1/2"	40/80/120/150	14	8	300	0.96
MYDF-50	2"	40/80/120/150	25	8	525	1.36
MYDF-65	2-1/2"	40/80/120	30	8	600	2.60
MYDF-80	3"	40/80/120	35	8	600	2.70

DIMENSION

MODEL	H (mm)	W (mm)	D (mm)
MYDF-O-20	173	176	93
MYDF-20	173	192	83
MYDF-O-25	173	176	93
MYDF-25	173	192	83
MYDF-32	230	250	120
MYDF-40	230	250	120
MYDF-50	260	290	140
MYDF-65	330	360	168
MYDF-80	330	360	168

